



SUB-METERING SPATIAL REQUIREMENTS

Installation regulations for individual Cold Water Sub-Meters require 150mm clearance from the centre of each meter to other meters, walls or pipework.

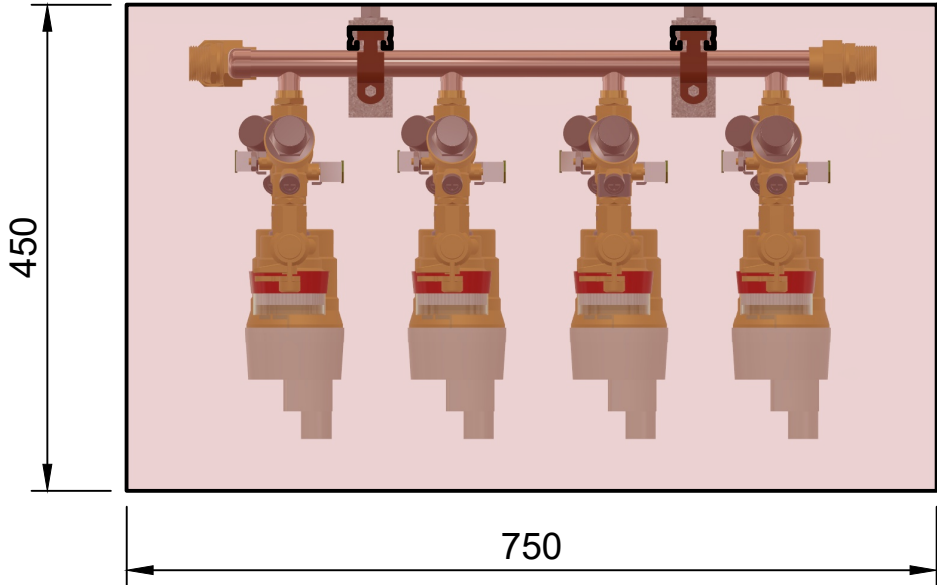

SMARTLINK NOTES

- All drawings detail All Valve Industries meters (iTron TD8 and All Valve GSD5). A breech peice between couplings is supplied at time of dispatch from deFOX Industries. Meters are not supplied by deFOX Industries.
- All drawings detail manifolds with a 25mm Ø as standard. Other Ø manifolds are available upon request. Large manifolds will increase the overall depth.

 SmartLink METERING SYSTEMS	Project SmartLink	Model No. SPATIAL	Date of issue 18/06/2025	
	Client	Description 7 to 8 Hot and Cold Sub-Metering Frame	Scale 1:10	
	Contact	Created by Arin de Mestre	Sheet 1/1	Rev.
This drawing remains the property of deFOX Industries Pty Ltd and may not be reproduced in full or part without the written consent of deFOX Indsutries.				